

# QDEK®

roofing adhesive



# 2301


## NC PVC MEMBRANE CONTACT ADHESIVE

QDEK® 2301 is a high performance, non-chlorinated polyurethane contact spray adhesive. QDEK® 2301 has been specifically developed for bonding plain PVC flat roofing membranes to a variety of roof decks including concrete, insulation boards, plywood and cementitious boards. QDEK® 2301 is excellent for detailed work where smoothness of the membrane is critical. QDEK® 2301 has excellent moisture resistance, a fully waterproof bond line and resists against plasticiser migration.

### BENEFITS

- High Grab.
- 100% Plasticiser Resistant.
- Structural curing bond line.
- Non-chlorinated solvent (NC).

### SQUARE METRE COVERAGE (m<sup>2</sup>):

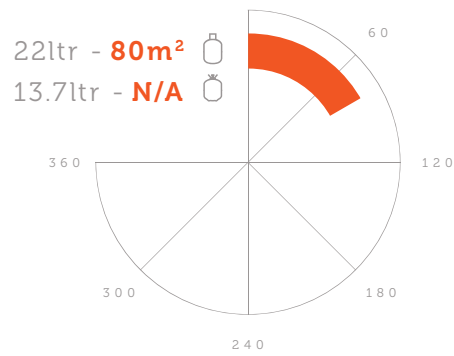

### APPLICATION TYPE:



2 sided

### OPEN TIME\*:



10 mins

### FLASH-OFF TIME\*\*:



2 - 3 mins

### SPRAY TYPE:



Web Spray

### GUN TYPE:



Detail Gun

### HOSE TYPE:



4m PU MB/HT



Field Gun

### COLOUR:

○ Clear

### TECHNICAL DATA:

Shelf Life	12 months
Appearance	Clear
Temperature Resistance	169°C
Solvent System	Non-MECL
Coverage	80m <sup>2</sup>
Solids	55%
VOC Content	Maximum of 299g/ltr
Storage	Above 10°C

**DIRECTIONS FOR USE**

- This product is designed to be applied to two surfaces to be bonded together. For best results, the temperature of the adhesive and the surfaces being bonded should be between 60 °F - 80 °F (16 °C - 27 °C).
- Use with adequate ventilation. When possible we recommend shaking the canister well before using.
- Attach and secure hose tightly onto the spray gun with required tip. Attach the other end of the hose onto the canister. Make sure the hose-valve connections are securely tight. Open the valve on the canister slowly and fully, check for leaks during this process. Unlock the trigger on the spray gun to start spraying.
- Prior to use, check compatibility by spraying a small test patch of the adhesive on the substrate. This product may degrade some substrates.



1. Make sure that surfaces are clean, dry and free from dirt, dust, oil, loose paint, wax or grease, etc.



2. Spray about 10-20 cm (4" – 8") away at a 90 degree angle to the surface, applying a uniform, even coat of adhesive to obtain 80% to 100% coverage of the surface. If necessary, spray another coat of adhesive in areas that appear to need more adhesive.



3. Spray both surfaces to be bonded, one surface vertically and the other surface horizontally.




4. Allow 2 - 3 minutes for the adhesive to tack off until no adhesive transfers to the knuckle when touched.




5. Adhere surfaces and press together with adequate pressure. A roller is recommended to apply a uniform pressure to achieve maximum strength. Allow 24 hours for the adhesive to fully cure.

6. If the spray tip clogs, unscrew the spray tip from the gun and clean with solvent such as lacquer thinner or acetone. Do not use a pin on the spray tip orifice.


**COVERAGE**



COVERAGE TOO LIGHT



COVERAGE TOO HEAVY



CORRECT APPLICATION = 20 dry gms/sqm

**CANISTER STORAGE/CHANGE OVER**

Turn valve on canister into the off position, spray out remaining adhesive left in the hose, disconnect the spray hose and gun from the canister. Reconnect the spray hose to a canister of cleaning solvent (sold separately) and spray out until liquid is clear which indicates that the hose and gun is clean. If you choose to leave the hose and spray gun on the canister, leave the valve on the canister open. Do not disconnect the hose/gun from the canister. Close and lock the spray gun.

**HANDLING & STORAGE**

- Consult Material Safety Data Sheet prior to use.
- DO NOT store at temperatures over 50°C.
- Avoid exposure to direct sunlight.
- DO NOT store directly on concrete floor.
- For optimum performance, store at 18°C during use, but must always be above 10°C.
- When connected, keep valve open and hose pressurised at all times.
- DO NOT close valve until ready to connect to new cylinder.
- Release pressure in hose before disconnection.
- Always test product to determine suitability for your particular application prior to use in production.

Copyright © 2019 by Quin Global UK Ltd  
All rights reserved. This publication or any portion thereof may not be reproduced or used in any manner whatsoever without the express written permission of the publisher. Printed in the UK.